



PEINEMANN

EQUIPMENT



30T Bundle Lifter


Innovative and safe

30T Bundle Lifter

The new Peinemann Bundle Lifter is the most recent development with regard to lifting bundles at Refineries and (Petro) chemical plants.

The unit is self-supportive due to the use of an air-cooled diesel engine. The engine drives the hydraulic pump and is equipped with a spark arrestor. All hydraulic functions are remote controlled for increased safety of the operator.

The bundle lifter can be adjusted to the diameter of the bundle by means of 2 sets of hydraulic cylinders fitted with holding valves.

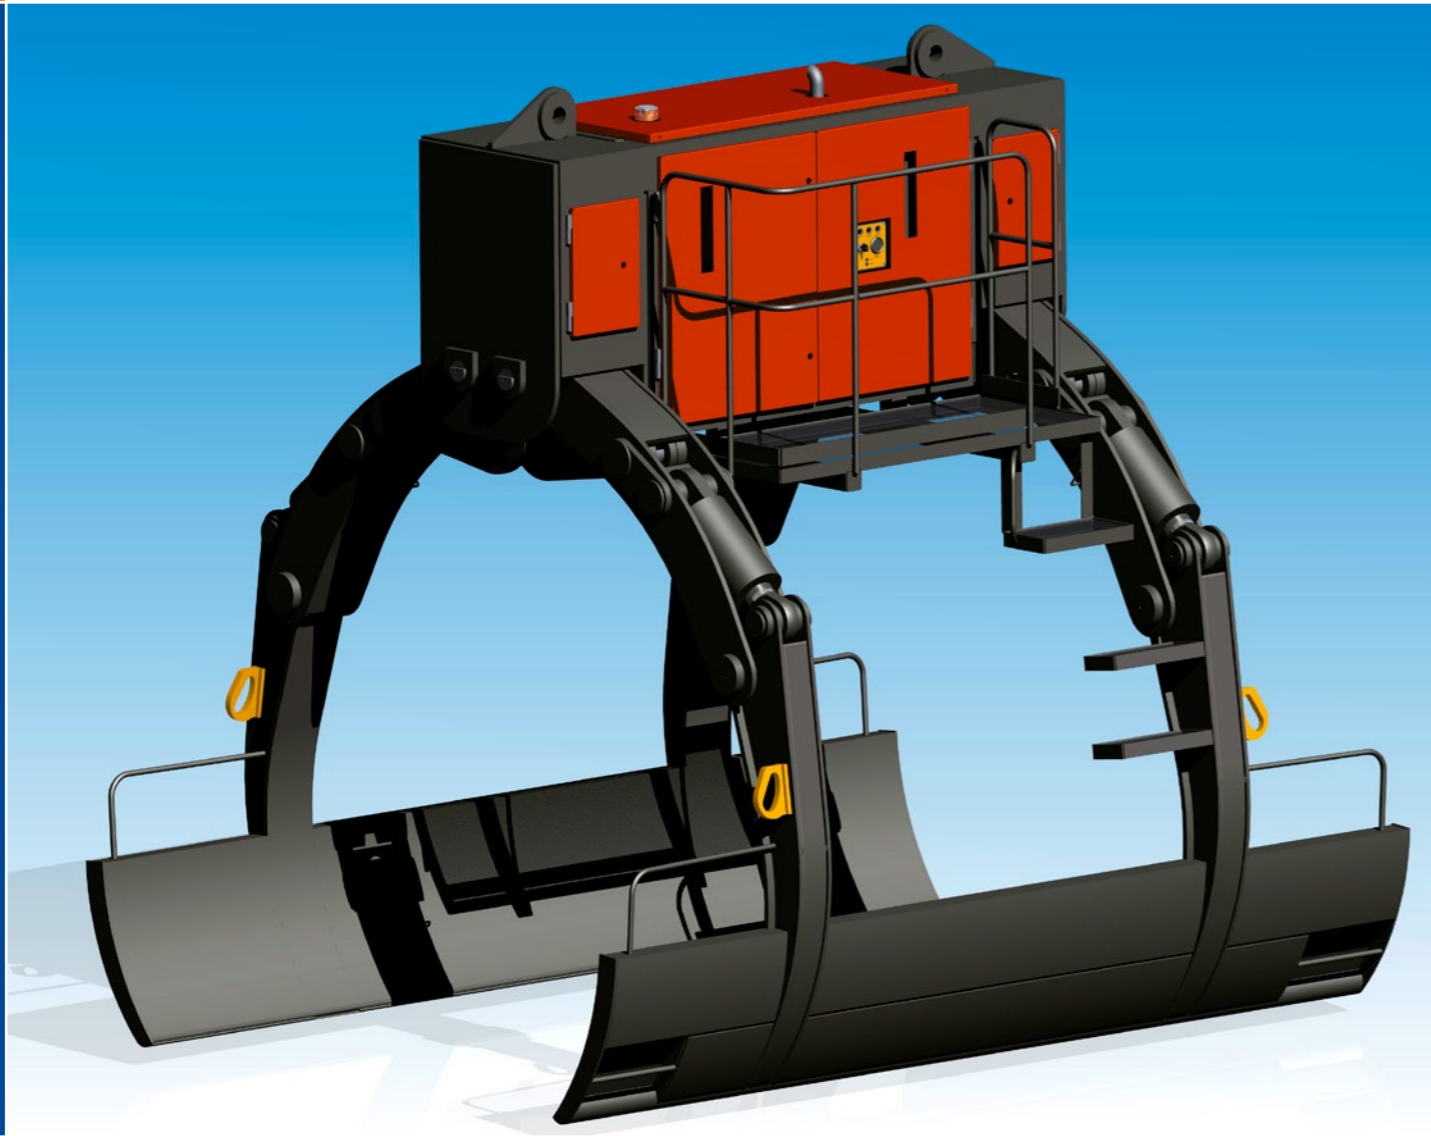

Advantages

Safety

The operator cannot get his hands in between the slings and the bundle. The operator doesn't need to climb on the trailer to handle the slings.

Efficiency

The bundle lifter is easy to position above the bundle which saves a lot of time. When the bundle lifter sets the bundles on the rollers for cleaning, there are no lifting slings around the baffle plates to cause problems. With the bundle lifter, the bottom of the bundle is free, making it easy to load it on the rollers.

Ergonomics

The rigger doesn't have to lift any heavy slings anymore and doesn't get dirty when he operates the wireless remote control.

Damages

The bundle lifter carries the bundle over a length of 3.6 m / 11.8 ft avoiding damages to the tubes, tie rods and baffle plates.

Especially when the bundles are fitted with half baffle plates and diagonal baffle plates, the bundle lifter has great advantages compared to the lifting slings.

Time savings

The bundle lifter can be operated by just 1 operator in comparison to 2 operators when using the traditional lifting slings.



PEINEMANN

EQUIPMENT

30T Bundle Lifter

Technical specifications

- **Weight**
approx. 4000 kg / 8,818 lbs
- **Length**
3600 mm / 11.81 ft
- **Transport height**
3400 mm / 11.15 ft
- **Transport width**
2500 mm / 8.2 ft
- **Capacity**
30 ton / 66,000 lbs
- **Bundle diameter**
300 mm - 2000 mm / 0,98 ft - 6,56 ft
(*baffle-plate diameter max. 1850 mm / 6.07 ft)
- **Operation**
2-hands control with wireless remote
- **Engine**
Hatz 2 cylinder air cooled diesel engine with spark arrestor and hydraulic pump



Peinemann Equipment

See also
www.peinemannequipment.com

Peinemann Equipment B.V.

Nieuwe Langeweg 40

3194 DB Hoogvliet

Phone: +31(0)10 - 295 50 00

Fax: +31(0)10 - 295 50 49

E-mail: pein@peinemann.nl

Website: www.peinemannequipment.com

Peinemann USA

22820 I-H 45 N., Bldg #7, Ste P

Spring, TX 77373

Phone: 281-288-7979

Fax: 866-431-5140